

SAFE - T 2 DRONE TETHER

POWERFUL, SECURED & SMART



Unlimited Secured Power
Up To 2.8kW



Up to 125 m / 400 ft.
Swappable Micro-tether



Fiber Optics & BPL
Dual-comms Option



Live Monitoring with
the T-Monitor App



Development
Tool Kit




Ready for Integration
with Mounting Plates



IP54
Certified

TECHNICAL SPECIFICATIONS

Micro-tether length	Up to 125m - 400 ft.
Micro-tether weight	Up to 25 g/m
Tensile strength	150 daN
Operational Temperature	-10 to 45° C (14° to 113° F)
Max continuous power	2200W cont. / 2800W peak
Micro-tether management	10 presets / Smart pre-programmed laws & reset function
Safety brake	Manages the tether length
Secured Dual-Comms	Fiber Optics & BPL
Wi-Fi Connectivity	Frequency 2.4GHz - 2.5GHz (2400MHz - 2483.5MHz) Encryption WEP/TKIP/AES
Power source requirement	200 - 250 VAC, 50 - 60 Hz, 4kW min
Power supply cable	Type E
Built-in protection	Fuse
Ingress protection level	IP54
Vehicle integration kit	Hardware & Software
Dimensions	610 x 410 x 265 mm (24" x 16" x 11") 25 kg (57lbs)

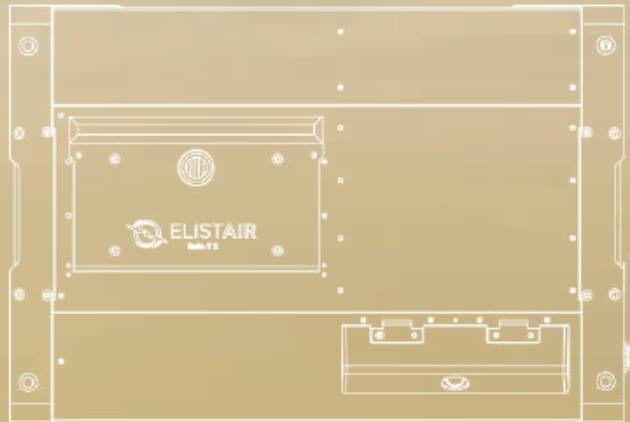

FULL RANGE OF AIR MODULES



M200 V2



M200 V1



Inspire 2



6S



12S



M100